



Ratchet lever hoist with roller chain model C 85

Capacity 750 - 10000 kg

Ratchet lever hoist with link chain model D 85

Capacity 750 - 10000 kg

Enclosed housing with housing cover, handlever and bottom block made from high tensile white malleable cast iron for overall rugged construction.

Almost unlimited applications in maintenance, mining, construction, steel fabrication, shipbuilding and utility work. Ideal for moving and positioning heavy machines and securing heavy loads, simplifies setting pipes etc. in manholes and trenches.

Features

- The graphite cast iron load sheave for the link chain has precision machined chain pockets for accurate fit and durability of the load chain.
- The roller chain sprocket is made from heat treated chromium-molybdenum steel with precision machined teeth to ensure smooth chain movement.

Option

- All models can be optionally equipped with an overload prevention device in the form of a slip clutch which is factory preset to approx. 25% ± 15% overload.
- Free chaining device to quickly attach the load or to pull the chain through the hoist in both directions.

Since 1936 more than 1 million units have been built in Velbert.



Optional:
Overload protection for
D95 and C/D85.

This ratchet lever hoist is suitable for cargo tie down applications, since it has an automatic screw-and-disc type load brake preventing an unintentional loosening of the load.


Hoisting equipment Ratchet lever hoists

Technical data model C 85

Model	EAN-No. 4025092*	Capacity kg	Number of chain falls	Chain dimensions d x p mm	Lift with one full lever turn mm	Handle pull at WLL daN	Net weight at standard lift (3 m) kg
Pul-lift C 85 750	*050173	750	1	5/8" x 3/8"	115	38	8.7
Pul-lift C 85 1500	*050180	1500	1	1" x 1/2"	45	31	17.0
Pul-lift C 85 3000	*050197	3000	1	1 1/4" x 5/8"	36	40	22.2
Pul-lift C 85 6000	*050203	6000	2	1 1/4" x 5/8"	18	44	38.0
Pul-lift C 85 10000	*050326	10000	3	1 1/4" x 5/8"	12	44	67.0

Dimensions model C85

Model	Pul-lift C 85 750	Pul-lift C 85 1500	Pul-lift C 85 3000	Pul-lift C 85 6000	Pul-lift C 85 10000
Amin., mm	322	389	403	560	785
B, mm	21	27	35	48	61
C, mm	27	30	34	46	54
D, mm	15	20	25	40	40
D1, mm	17	23	25	40	45
E, mm	443	443	570	570	570
F, mm	112	189	197	197	305
G, mm	56	134	142	142	163
H, mm	56	55	55	55	142
J, mm	142	171	179	218	218
K, mm	39	72	76	76	76
L, mm	103	99	103	142	142

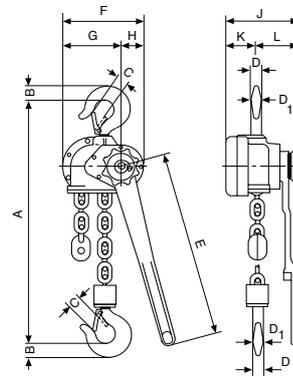

Model C/D85


Technical data model D 85

Model	EAN-No. 4025092*	Capacity kg	Number of chain falls	Chain dimensions d x p mm	Lift with one full lever turn mm	Handle pull at WLL daN	Net weight at standard lift (3 m) kg
Pul-lift D 85 750	*050548	750	1	6 x 18.5	111	38	8.2
Pul-lift D 85 1500	*050555	1500	1	9 x 27	45	31	16.3
Pul-lift D 85 3000	*050562	3000	1	11 x 31	33	40	19.6
Pul-lift D 85 6000	*050579	6000	2	11 x 31	17	42	32.9
Pul-lift D 85 10000	*050784	10000	3	11 x 31	11	37	60.0

Dimensions model D 85

Model	Pul-lift D 85 750	Pul-lift D 85 1500	Pul-lift D 85 3000	Pul-lift D 85 6000	Pul-lift D 85 10000
Amin., mm	322	389	403	532	805
B, mm	21	27	35	48	61
C, mm	27	30	34	46	54
D, mm	15	20	25	40	40
D1, mm	17	23	25	40	45
E, mm	443	443	570	570	570
F, mm	112	189	197	197	305
G, mm	56	134	142	142	163
H, mm	56	55	55	55	142
J, mm	142	171	179	218	218
K, mm	39	72	76	76	76
L, mm	103	99	103	142	142

! Yale hoists and trolleys are not designed for passenger elevation applications and must not be used for this purpose.

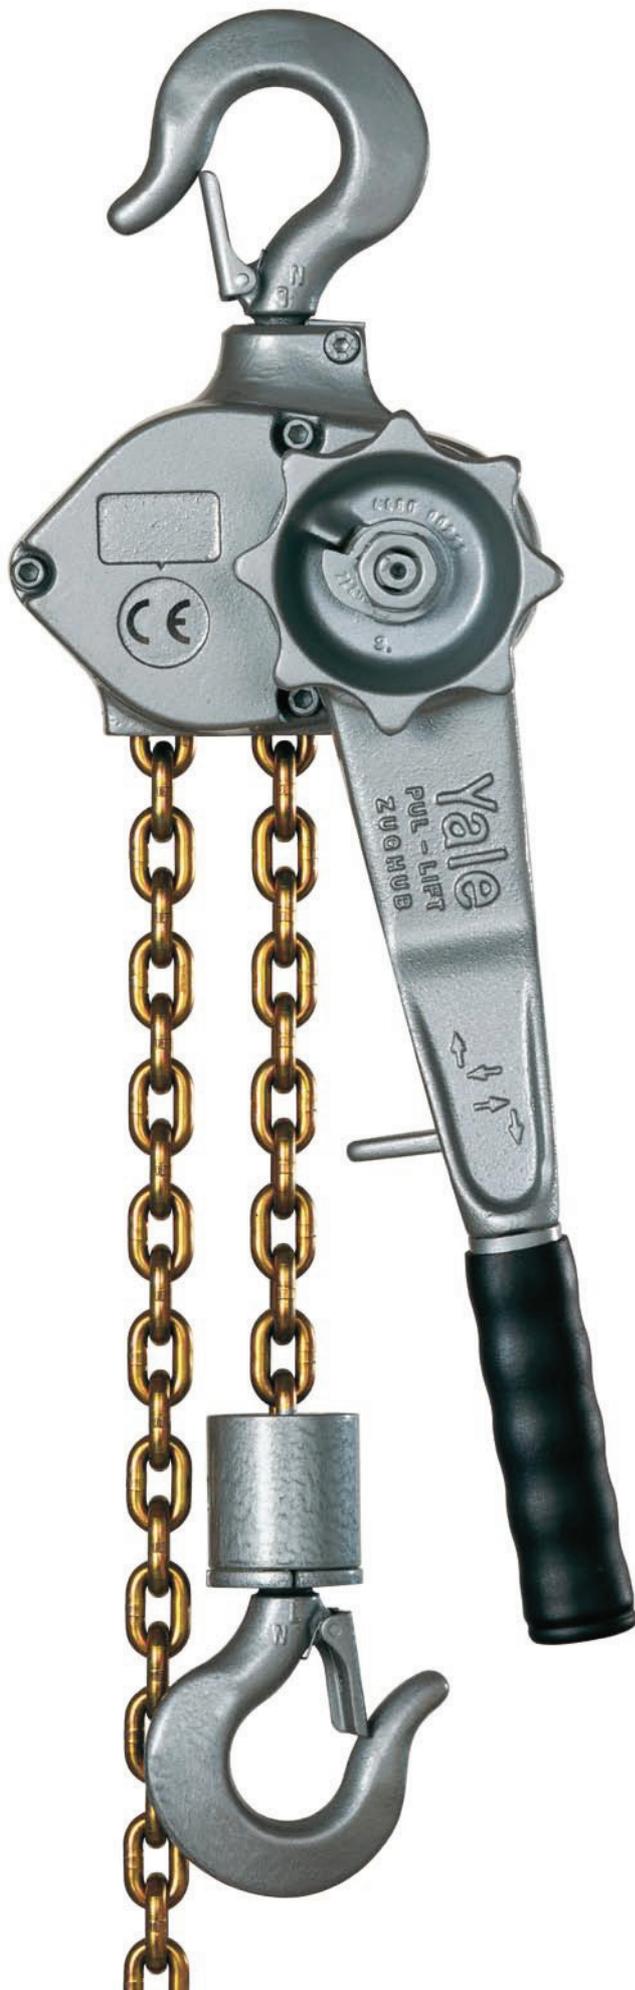

Ratchet lever hoist with link chain model D 95

Capacity 1500 - 3000 kg

The D 95 in its cast malleable iron design has taken key technical features from the proven D 85 but excels due to low tare weight and an extremely small measurement between suspension and load hooks.

A versatile unit for moving, positioning and securing loads.

Features

- It has an automatically acting load pressure brake which works on the self-locking principal. For example, when used to secure loads an unintentional loosening of the brake is prevented when the load vibrates.
- Alloyed steel link chain with zinc-plated resp. yellow chromated finish, in accordance with national and international standards and regulations.
- Standard free chaining device to quickly attach the load or to pull the chain through the hoist in both directions.
- Body and handlever made from impact resistant malleable cast iron.
- The short ergonomic handlever is fitted with a rubber grip.

Option

- All models can be optionally equipped with an overload prevention device in the form of a slip clutch which is factory preset to approx. 25% ± 15% overload.
- Hoist with sling chain.

This ratchet lever hoist is suitable for cargo tie down applications, since it has an automatic screw-and-disc type load brake preventing an unintentional loosening of the load.



Pul-lift D95 with sling chain.


Hoisting equipment Ratchet lever hoists

Technical data model D 95

Model	EAN-No. 4025092*	Capacity kg	Number of chain falls	Chain dimensions d x p mm	Lift with one full lever turn mm	Handle pull at WLL daN	Net weight at standard lift (3 m) kg
Pul-lift D 95 1500	*050807	1500	1	6.2 x 18.5	35	27	9.9
Pul-lift D 95 3000	*050821	3000	1	9 x 27.2	38	49	16.5

Dimensions model D 95

Model	D 95 1500	D 95 3000
Amin., mm	314	376
B, mm	23	30
C, mm	23	25
D, mm	18	22
D1, mm	18	22
E, mm	315	443
F, mm	156	189
G, mm	112	134
H, mm	44	55
J, mm	141	177
K, mm	49,5	72
L, mm	92	105

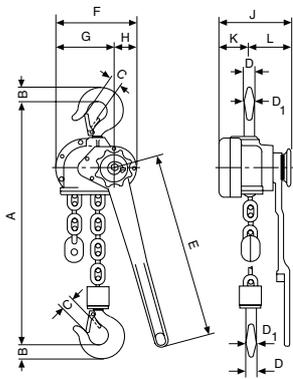

Pul-lift D 95



! Yale hoists and trolleys are not designed for passenger elevation applications and must not be used for this purpose.