



Pivot Hoist Rings



HR-100 UNC

- Forged bail provides the following:
 - Easily readable raised lettering showing the name Crosby or "CG" and PIC code for material traceability.
 - More durability provides the increased "Toughness" desired in potentially abusive field conditions
 - Larger opening than standard Hoist Ring bails.
- 180 degree pivot action at full capacity.
- Bolts included as part of assembly.
- Design Factor of 5 to 1.
- Individually Proof Tested to 2-1/2 times Working Load Limit.
- UNC Bolt specification is a Grade 8 Alloy socket head cap screw to ASTM A 574.
- Frame 2 and larger are **RFID EQUIPPED**.

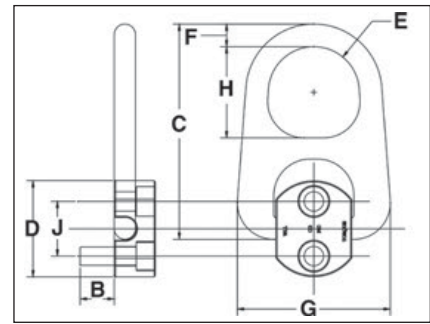

Load Rated



Rigging
Accessories

HR-100 Pivot Hoist Rings Coil Threads

Frame Size No.	HR-100 Stock No.	Working Load Limit (kg)*	Torque (Nm)	No. of Bolts	Weight Each (kg)	Bolt Size A (in)	Dimensions (mm)								
							Effective Thread Projection Length B	C	Diameter D	Radius E	F	G	H	J	K
1	1067408	907	10	2	.30	5/16-18 x 1.25	20.8	87.1	50.8	15.7	11.2	57.7	35.1	25.4	-
2	1067417	1134	16	2	1.40	3/8-16 x 1.25	16.5	153	57.2	31.8	19.1	107	63.5	28.6	-
2	1067426	2268	38	2	1.50	1/2-13 x 2.00	35.6	153	66.8	31.8	19.1	107	63.5	38.1	-
3	1067435	5443	38	4	4.80	1/2-13 x 2.75	41.9	210	79.5	41.4	25.4	159	82.6	41.3	31.8
4	1067444	9072	81	4	10.0	5/8-11 x 3.25	41.9	270	114	50.8	31.8	199	102	52.4	31.8

*Ultimate Load is 5 times the Working Load Limit.