

Crosby® Specialty Shackles


Load Rated® Fatigue Rated®



G-209R ROV SHACKLES



- Capacities from 6-1/2t through 55t.
- Forged Steel, Quenched & Tempered, with alloy pins.
- Working Load Limit permanently shown on every shackle.
- Fatigue rated.
- QUIC-CHECK® deformation and angle indicators forged on the bow.
- All ROV shackle bows, unless otherwise noted, are galvanized, then painted fluorescent yellow.
- Look for the Red Pin® . . . the mark of genuine Crosby quality.

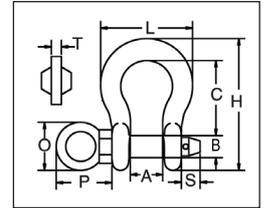

NOTE: ROV Hooks available on page 116 and 117.

G-209R ROV Shackles

Working Load Limit (t)*	G-209R Stock No.	Weight Each (kg)	Dimensions (mm)								
			A +/- 6.35	B	C	H	L	O	P	S	T
6-1/2	1020872	1.69	36.6	25.4	84.0	148	102	50	58	17	10
8-1/2	1020902	2.59	42.9	28.7	95.5	167	119	50	61	18	10
9-1/2	1020932	3.77	46.0	31.8	108	190	131	70	83	18	12
12	1020952	5.02	51.5	35.1	119	210	146	70	84	23	12
13-1/2	1020972	6.65	57.0	38.1	133	233	162	75	91	23	15
17	1020992	8.58	60.5	41.4	146	254	175	75	93	24	15
† 25	1021102	14.1	73.0	51.0	178	313	225	90	114	29	17.5
† 35	1021125	21.4	82.5	57.0	197	348	253	106	132	30	20
† 55	1021158	42.8	105	70.0	267	453	327	120	145	45	25

* Minimum Ultimate Load is 5 times the Working Load Limit.

† Furnished with Galvanized Finish.

Load Rated® Fatigue Rated®




MAXTOUGH®

S-209T THEATRICAL SHACKLES



- Sizes: 3/8" through 3/4"
- Capacities: 1 through 4-3/4 metric tonnes.
- Forged - Quenched and Tempered, with alloy pins.
- Working Load Limit permanently shown on every shackle.
- Flat black baked on power coat finish.
- Fatigue Rated.
- Industry leading 6 to 1 design factor.
- Screw pin anchor shackles meet the performance requirement of Federal Specification RR-C-271F Type A, Grade A, Class 2, except for those provisions required of the contractor.
- Meets the performance requirements of EN 13889:2003.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these shackles meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.

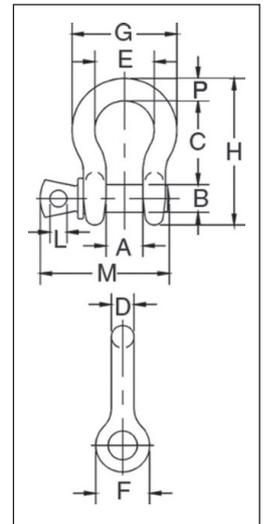

S-209T Theatrical Shackles

Nominal Size (in.)	Working Load Limit (t)*	S-209T Stock No.	Weight Each (kg)	Dimensions (mm)												Tolerance +/-	
				A	B	C	D	E	F	G	H	L	M	P	C	A	
3/8	1	1018706	.14	16.8	11.2	36.6	9.65	26.2	23.1	45.2	63.0	6.35	51.5	9.65	3.30	1.50	
7/16	1-1/2	1018724	.17	19.1	12.7	42.9	11.2	29.9	26.9	51.5	74.0	7.85	60.5	11.2	3.30	1.50	
1/2	2	1018742	.33	20.6	16.0	47.8	12.7	33.3	30.2	58.5	83.5	9.65	68.5	12.7	3.30	1.50	
5/8	3-1/4	1018760	.62	26.9	19.1	60.5	16.0	42.9	38.1	74.5	106	11.2	85.0	17.5	6.35	1.50	
3/4	4-3/4	1018778	1.07	31.8	22.4	71.5	19.1	51.0	46.0	89.0	126	12.7	101	20.6	6.35	1.50	