


ROV Anchor Shackle with Safety Pin

YOKE ROV shackles are manufactured with the highest quality steel available and are designed specifically for ROV application.

Shackles are individually stamped with the safe working load limit and are proof tested to 2 times the safe working load - test certs are always provided.

YOKE ROV shackles are painted yellow to ensure ease of sight in water.

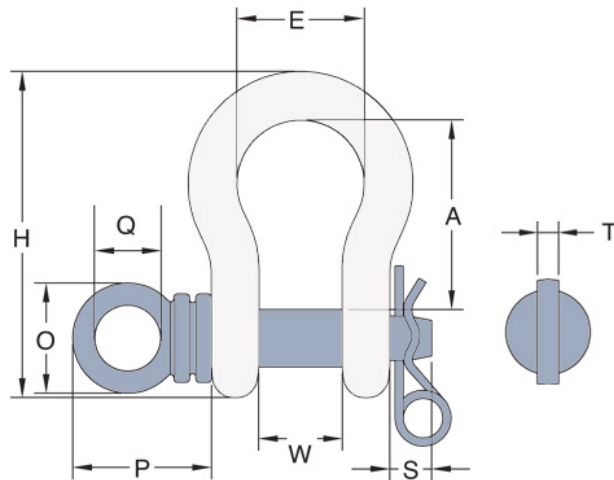

Part No	Size inch	Size mm	WLL tonnes	P mm	O mm	W mm	A mm	E mm	T mm	H mm	S mm	Weight Kg
8-911-22	7/8	22	6.5	63	50	38	86	58	10	148	19	1.7
8-911-26	1	26	8.5	65	50	44	96	69	10	166	20	2.4
8-911-28	1-1/8	28	9.5	88	70	46	111	74	12	190	21	3.5
8-911-32	1-1/4	32	12.0	88	70	54	121	84	12	210	25	4.8
8-911-36	1-3/8	36	13.5	96	75	59	134	92	15	232	27	6.6
8-911-38	1-1/2	38	17.0	98	75	60	146	99	15	254	27	8.2
8-911-45	1-3/4	45	25.0	114	90	73	178	127	20	313	30	14.2
8-911-50	2	50	35.0	132	106	83	197	146	20	347	30	23.5

Both tables: Min. Ultimate Load is 5 times the Working Load Limit - Max. Proof Load is 2 times the Working Load Limit

Part No	Size inch	Size mm	WLL tonnes	P inch	O inch	W inch	A inch	E inch	T inch	H inch	S inch	Weight Lbs
8-911-22	7/8	22	6.5	2.48	1.96	1.50	3.39	2.28	0.39	5.91	0.74	3.74
8-911-26	1	26	8.5	2.55	1.96	1.73	3.78	2.68	0.39	6.57	0.78	5.28
8-911-28	1-1/8	28	9.5	3.46	2.75	1.81	4.37	2.91	0.47	7.52	0.82	7.70
8-911-32	1-1/4	32	12.0	3.46	2.75	2.12	4.76	3.30	0.47	8.07	0.98	10.56
8-911-36	1-3/8	36	13.5	3.77	2.95	2.32	5.28	3.62	0.59	9.13	1.06	14.52
8-911-38	1-1/2	38	17.0	3.85	2.95	2.36	5.75	3.90	0.59	10.00	1.06	18.04
8-911-45	1-3/4	45	25.0	4.48	3.54	2.87	7.00	5.00	0.78	12.32	1.18	31.24
8-911-50	2	50	35.0	5.19	4.17	3.27	7.76	5.75	0.78	13.66	1.18	51.70