


Yoke Grade 8 Swivel Self Locking Hook with Ball Bearing BS EN1677-1+2

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 8 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

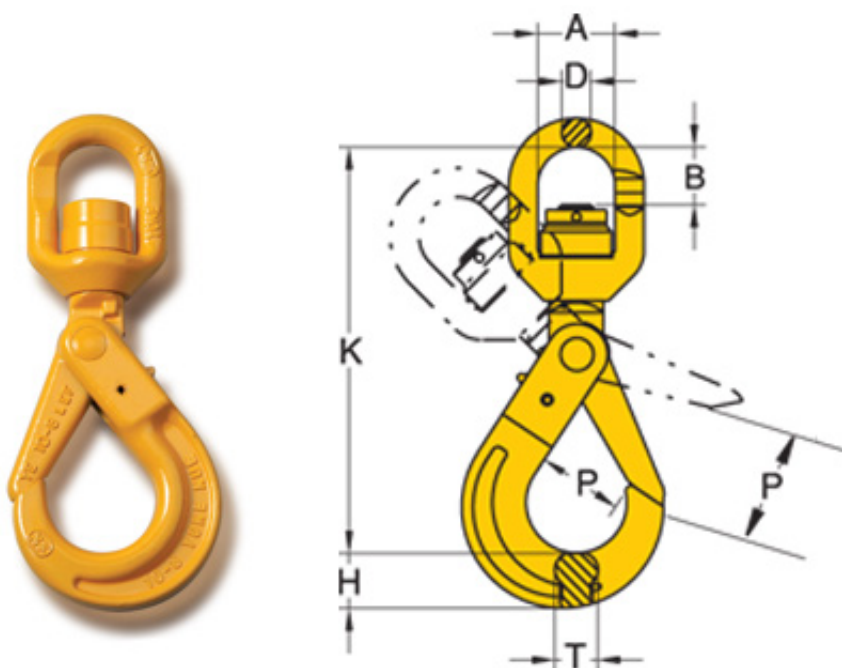

SPECIFICATIONS

Part Code	Chain Size mm	K mm	P mm	B mm	A mm	D mm	T mm	H mm	W.L.L. Tonnes	Box Quantity	Mass Kg
8-027N-07	7,8	186	34	29	36	14	20	24	2.0	12	1.2
8-027N-10	10	220	44	34	40	16	26	30	3.15	7	2.0
8-027N-13	13	267	52	43	46	22	30	39	5.3	4	4.2
8-027N-16	16	328	60	50	60	24	36	49	8.0	3	7.3
8-027N-20	20	388	90	82	75	26	48	62	12.5	2	11.4
8-027N-22	22	457	80	95	97	33	49	63	15.0	1	18.1
8-027N-26	26	535	99	115	123	42	56	69	21.2	1	29.5

This hook is designed to fully swivel while in use lifting a load