


Yoke Grade 8 Swivel Sling Hook with Ball Bearing BS EN1677-1+2

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 8 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

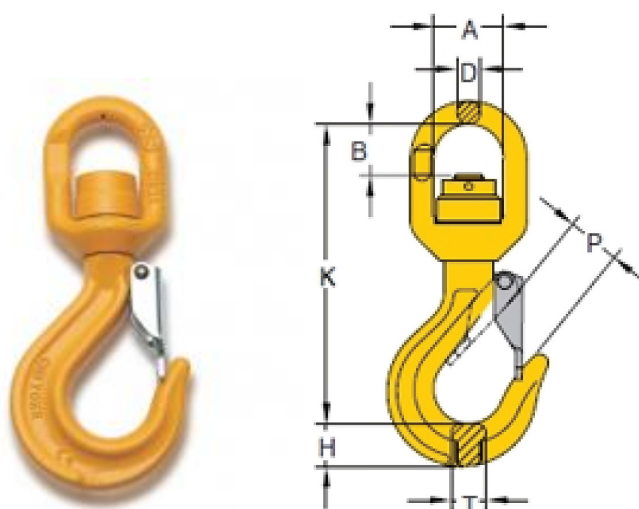

SPECIFICATIONS

Part Code	Chain Size mm	K mm	P mm	B mm	A mm	D mm	T mm	H mm	W.L.L. Tonnes	Box Quantity	Mass Kg
8-049N-07	7,8	155	26	27	36	12	18	22	2.0	20	0.9
8-049N-10	10	189	36	37	41	16	23	29	3.15	8	1.6
8-049N-13	13	233	42	40	46	21	28	35	5.3	6	3.2
8-049N-16	16	280	50	50	60	22	35	44	8.0	4	5.3
8-049N-20	20	356	56	82	74	25	49	65	12.5	2	9.2

This hook is designed to fully swivel while in use lifting a load