

Crosby® SHUR-LOC® Hooks



SEE APPLICATION AND WARNING INFORMATION
 Para Español: www.thecrosbygroup.com On Pages 265-266

S-1316



All SHUR-LOC® hooks have the following features:

- Forged Alloy Steel - Quenched and Tempered.
- Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
 - Easy to operate with enlarged thumb access.
- Positive Lock Latch is Self-Locking when hook is loaded.
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).


S-1318A



Eye Style incorporates these added features:

- Individually Proof Tested to 2-1/2 times the 4:1 Working Load Limit with certification.
- S-1316 meets the performance requirements of EN1677-3:2001
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- 25% stronger than Grade 80.
- Suitable for use with Grade 100 and Grade 80 chain.
- Designed with "Engineered Flat" to connect to S-1325 chain coupler.


SHUR-LOC® Hook Series with Positive Locking Latch S-1316 Eye Hook

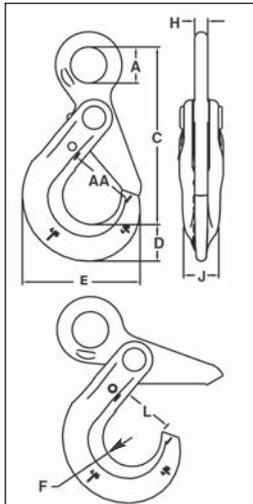

Chain Size		Working Load Limit (t)*	Wire Rope XXIP IWRC Mechanical Splice		S-1316 Stock No.	Weight Each (kg)	Dimensions (mm)									
(in.)	(mm)		Size (mm)	Working Load Limit (t) 5:1			A	C	D	E	F	H	J	L	AA	
-	6	1.45	8	1.00	1022896	.39	19.8	100	20.1	66.0	17.0	7.87	16.0	29.5	38.1	
1/4-5/16	7-8	2.60	11	1.90	1022914	.82	27.4	135	27.9	88.9	22.1	9.91	20.6	37.6	51.0	
3/8	10	4.00	13	2.50	1022923	1.54	33.0	167	29.7	112	27.9	12.9	23.9	46.5	63.5	
1/2	13	6.80	19	5.62	1022932	2.72	41.9	209	42.4	139	32.0	17.0	29.5	56.4	76.2	
5/8	16	10.30	22	7.53	1022941	6.83	55.9	256	51.8	167	38.1	22.1	38.1	67.3	89.0	
3/4	18-20	16.00	25	9.98	1022942	8.61	66.0	274	56.4	197	51.1	22.1	51.6	89.4	-	
7/8	22	19.40	28.6	12.0	1022943	12.7	72.9	317	62.2	222	57.7	24.9	55.9	97.3	-	
1	26	27.10	-	-	1022944	22.45	80.0	371	81.5	251	62.5	32.0	68.1	104	-	

* Minimum Ultimate Load is 4 times the Working Load Limit.

S-1318A SHUR-LOC® Shank Hook

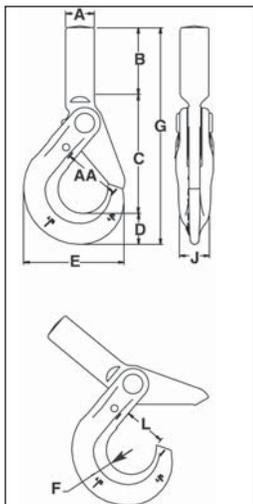

Chain Size		S-1318A Stock No.	Frame code	Grade 100 Alloy Chain Working Load Limit(t)*	Dimensions (mm)										Weight Each (kg)
(in.)	(mm)				A†	B	C	D	E	F	G	J	L	AA	
-	6	1098200	D	1.45	20.1	55.0	84.0	20.1	66.0	17.0	159	16.0	28.7	38.1	.45
1/4-5/16	7-8	1098209	G	2.59	25.4	61.0	106	27.9	89.0	22.1	195	20.6	35.1	51.0	.90
3/8	10	1098218	H	3.99	29.0	75.0	131	29.7	112	27.9	235	23.9	46.5	63.5	1.61
1/2	13	1098227	I	7	34.0	85.0	160	42.4	138	32.0	288	29.5	53.5	76.2	3.18
5/8	16	1098236	J	10	41.4	100	185	52.0	167	38.1	337	38.1	63.0	89.0	7.26

* Ultimate Load is 4 times the Working Load Limit based on Grade 100 chain.

† Dimension before machining (as forged).