


## Gunnebo Lifting Standard Shackle No 834 and No 835

### Dee shackles

- Standard: DNV 2.7-1 Type-Approved, EN-13889 and U.S Fed. Spec. RR-C-271
- Material: High Tensile Carbon Steel, Quenched and tempered, Grade 6
- Finish: All parts hot dip galvanized, brown painted pins on top of galv.
- Safety factor: 6:1
- Documentation: Test certificate and traceable raw material / inspection certificate acc. EN 10204 - 3.1.  
 Sizes from 2 - 25 tonnes can be supplied with DNV 2.7-1 Type Approval Certification.
- Temperature: -20°C to 200°C

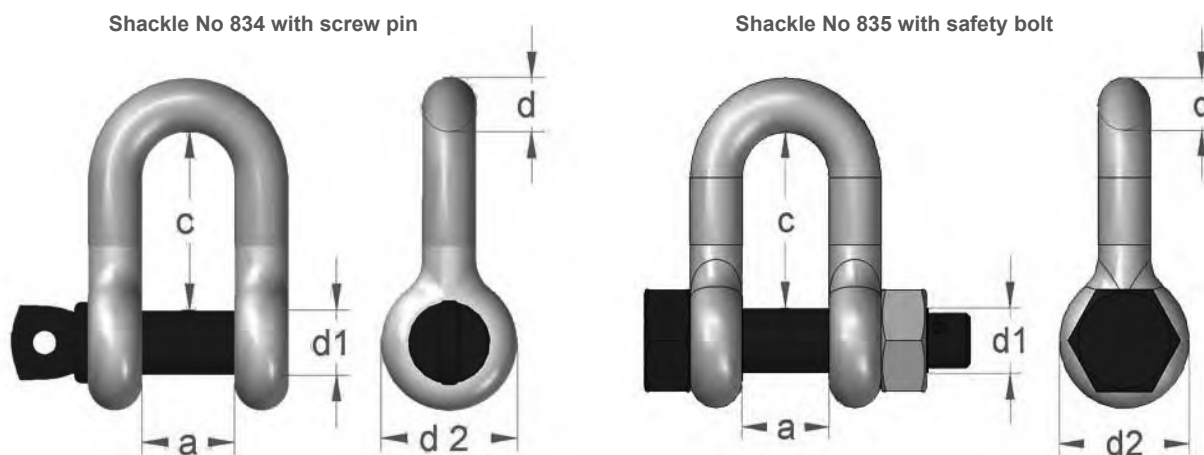

Measurement in mm									
Art. no. Screw pin	Art. no. Safety bolt	Dim. d1	Dim. d (mm - inch)	Inner width a*	Inner length c*	Eye outer d2	WLL (tonnes) 6:1	Screw pin (kgs)	Safety bolt (kgs)
A083405	-	6	5 - 3/16"	10	22	13	0.33	0.02	-
A083406	-	8	7 - 1/4"	12	25	12	0.5	0.06	-
A083408	-	10	9 - 5/16"	13.5	27	16	0.75	0.11	-
A083409	-	11	10 - 3/8"	17	31	20	1	0.15	-
A083411	-	13	11 - 7/16"	18.5	37	22	1.5	0.21	-
A083413	A083513	16	13 - 1/2"	21	41	33	2	0.25	0.30
A083416	A083516	19	16 - 5/8"	27	51	40	3.25	0.55	0.60
A083419	A083519	22	19 - 3/4"	31	60	47	4.75	1.00	1.10
A083422	A083522	25	22 - 7/8"	37	71	50	6.5	1.30	1.50
A083425	A083525	28	25 - 1"	43	81	58	8.5	1.90	2.20
A083428	A083528	32	28 - 1.1/8"	46	90	64	9.5	2.80	3.10
A083432	A083532	35	32 - 1.1/4"	52	100	72	12	3.60	4.20
A083435	A083535	38	35 - 1.3/8"	57	111	74	13.5	4.60	5.60
A083438	A083538	42	38 - 1.1/2"	60	122	84	17	6.50	7.50
A083445	A083545	50	45 - 1.3/4"	74	149	105	25	11.50	13.00
A083452	A083552	57	50 - 2"	83	171	127	35	16.00	18.00
-	A083564	70	65 - 2.1/2"	105	203	152	55	-	39.00

\* Forging tolerance: +/- 5% on inside width/length.