


Yoke Grade 10 Clevis Self Locking Hook EN1677

The William Hackett Grade 10 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 10 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit. Testing according to ASTM A952/A - DIN PAS 1061

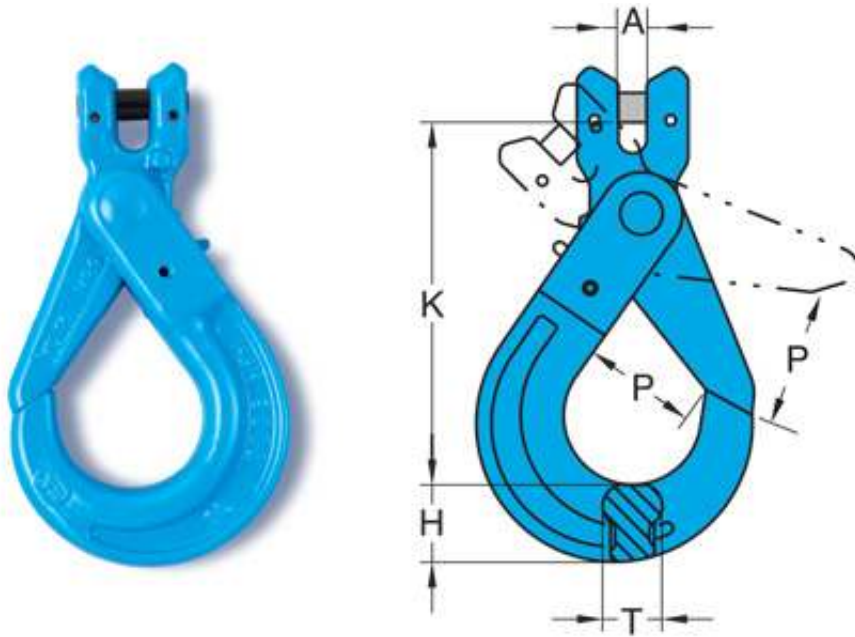

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	H mm	K mm	P mm	T mm	WLL tonnes	Box Quantity	Mass Kg
X-026-06	6	6	19	93	28	15	1.4	40	0.4
X-026-07	7/8	9	24	119	34	20	2.5	20	0.9
X-026-10	10	11	30	142	44	26	4.0	15	1.4
X-026-13	13	14	39	178	51	30	6.7	6	3.0
X-026-16	16	18	49	213	60	36	10.0	4	5.0
X-026-20	20	21	65	244	70	53	16.0	2	11.0

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	H inch	K inch	P inch	T inch	WLL lbs	Box Quantity	Mass lbs
X-026-06	1/4	0.24	0.75	3.66	1.10	0.59	3000	40	0.88
X-026-07	5/16	0.35	0.94	4.68	1.33	0.78	5500	20	1.98
X-026-10	3/8	0.43	1.18	5.59	1.73	1.02	8800	15	3.08
X-026-13	1/2	0.51	1.54	7.00	2.00	1.18	14700	6	6.61
X-026-16	5/8	0.70	1.93	8.38	2.36	1.41	22000	4	11.02
X-026-20	3/4	0.83	2.56	9.60	2.75	2.08	35000	2	24.25